


# BDX 2000F ■

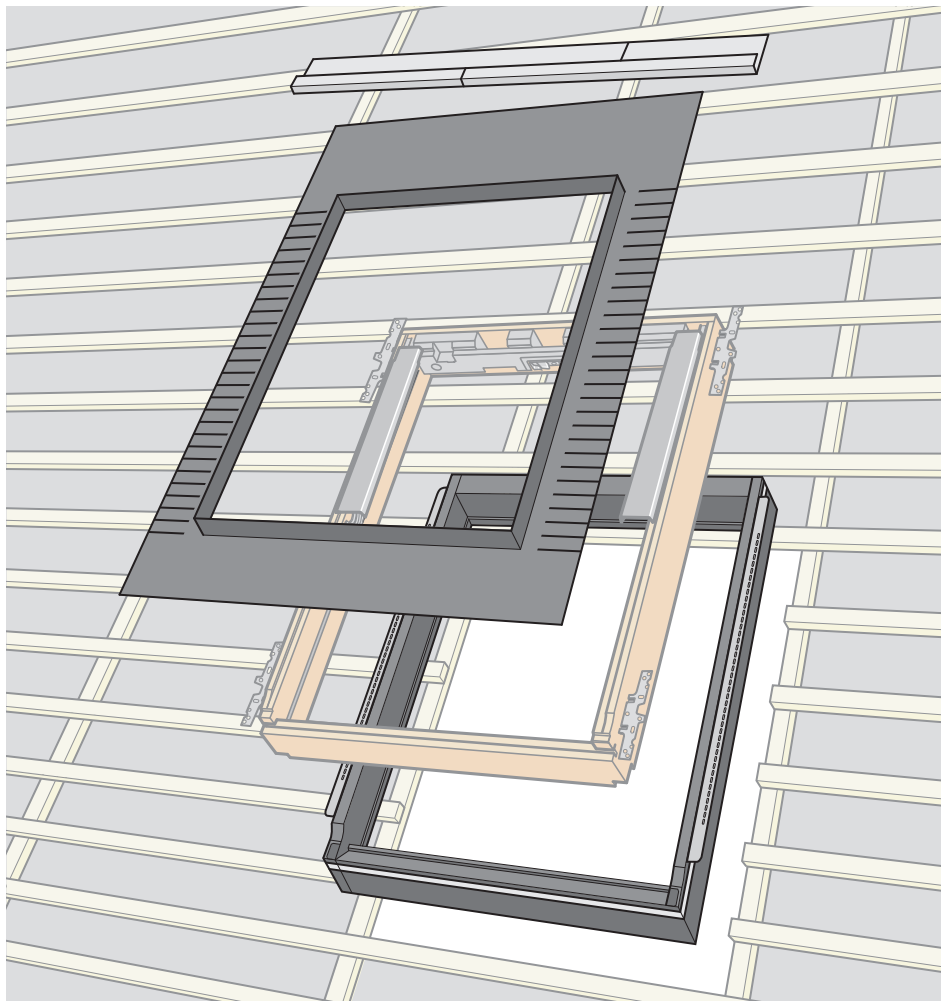

<b>CE</b> 13	
EN 13859-1:2014 Notified body: 0338	
<b>BFX</b>	
Flexible sheet for underlays for roofs	
<b>Reaction to fire:</b> <b>Resistance to water penetration:</b> - before artificial ageing: - after artificial ageing: <b>Tensile strength in longitudinal direction:</b> - before artificial ageing: - after artificial ageing: <b>Tensile strength in transverse direction:</b> - before artificial ageing: - after artificial ageing:	Class E  Class W1 Class W1  200 N/50 mm 120 N/50 mm  200 N/50 mm 120 N/50 mm
VELUX A/S Ådalsvej 99 DK-2970 Hørsholm <a href="http://www.velux.com/ce">www.velux.com/ce</a>	

<b>CE</b> 13	
EN 16069:2012+A1:2015 Notified body: 0761, 1004	
<b>BDX</b>	
Thermal insulation product for buildings	
<b>Reaction to fire:</b> <b>Thermal conductivity:</b>	Class E  0,039 W/(mK)
VELUX A/S Ådalsvej 99 DK-2970 Hørsholm <a href="http://www.velux.com/ce">www.velux.com/ce</a>	