




BDX W34 2000/2001

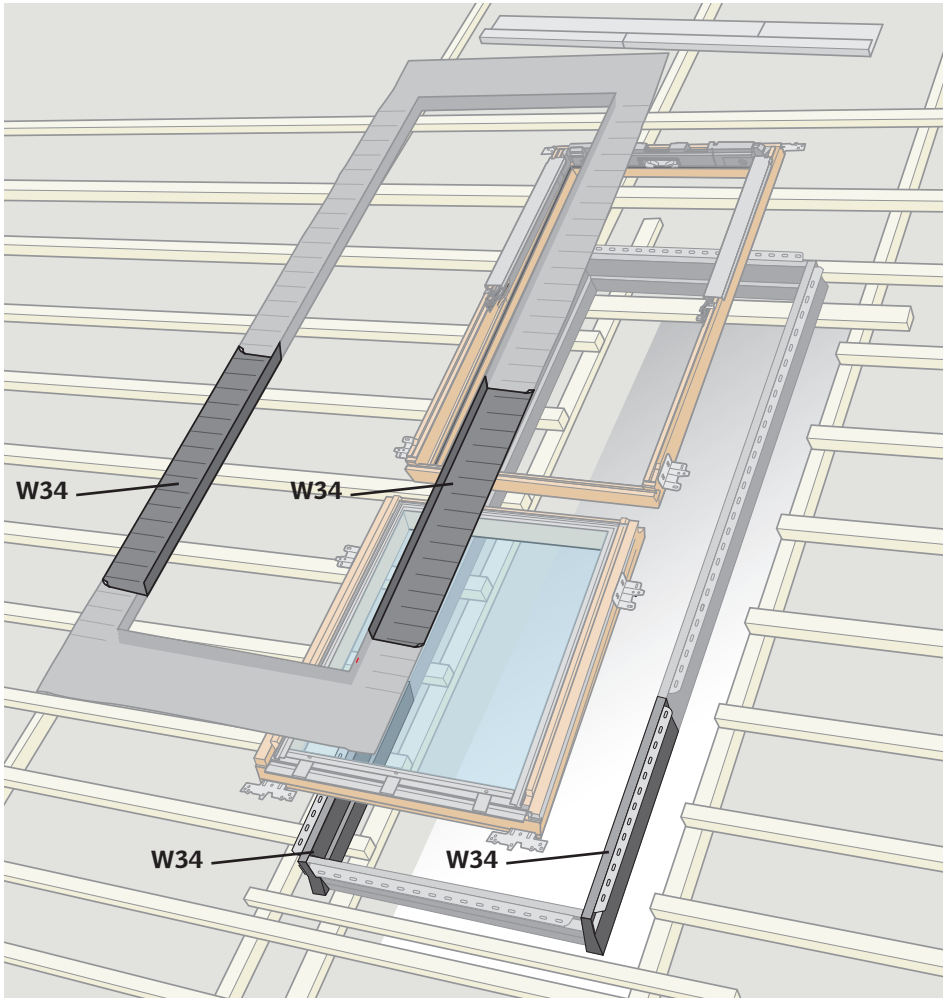

| | |
|--|-------------|
|  13 | |
| EN 13859-1:2014 Notified body: 0338 | |
| BFX | |
| Flexible sheet for underlays for roofs | |
| Reaction to fire: | Class E |
| Resistance to water penetration: | |
| - before artificial ageing: | Class W1 |
| - after artificial ageing: | Class W1 |
| Tensile strength in longitudinal direction: | |
| - before artificial ageing: | 200 N/50 mm |
| - after artificial ageing: | 120 N/50 mm |
| Tensile strength in transverse direction: | |
| - before artificial ageing: | 200 N/50 mm |
| - after artificial ageing: | 120 N/50 mm |
| VELUX A/S Ådalsvej 99 DK-2970 Hørsholm www.velux.com/ce | |

| | |
|--|--------------|
|  13 | |
| EN 16069:2012+A1:2015 Notified body: 0761, 1004 | |
| BDX | |
| Thermal insulation product for buildings | |
| Reaction to fire: | Class E |
| Thermal conductivity: | 0,039 W/(mK) |
| VELUX A/S Ådalsvej 99 DK-2970 Hørsholm www.velux.com/ce | |