

VELUX conservation roof window GGL

Glazing 70

VELUX®



Conservation roof windows are the perfect choice when renovating conservation buildings. Top-operated conservation roof windows are easily opened and closed – even with furniture placed underneath. The window's black exterior profiles and glazing bar blend seamlessly into the roof and match the original look of your building.

- Perfect when a glazing bar is required for conservation buildings.
- Open the top control bar to the ventilation position for fresh air through a closed window.
- Refresh your home by slightly opening the window and fixing it in the top bushing.
- Easily rotate the window 180° for safe cleaning of the outer glass from the inside.
- Removable and cleanable ventilation filter protects your home from dust and insects while ventilating.
- Maintenance-free exterior covers increase peace of mind throughout the lifetime of the roof window.
- The exclusive top control bar complements the window for a modern, elegant look.



Application guidance

The window can be installed in roof pitches between 15° and 90° to the horizontal.




Manually top-operated, centre-pivot roof windows make it possible to place furniture directly below the window without obstructing the window's operation. We recommend an installation height that allows for a clear sight line to the outside from both a standing and seated position. Please note that the optimum window height depends on the roof pitch.

Available sizes and daylight area

| | 550 | 660 | 780 | 1340 |
|------|-----------------------|-----------------------|-----------------------|------|
| 1178 | GGL CK06 (0.37) | GGL FK06 (0.47) | GGL MK06 (0.59) | |
| 1398 | | | GGL MK08 (0.72) | |

All measurements are in mm. () = Effective daylight area, m²



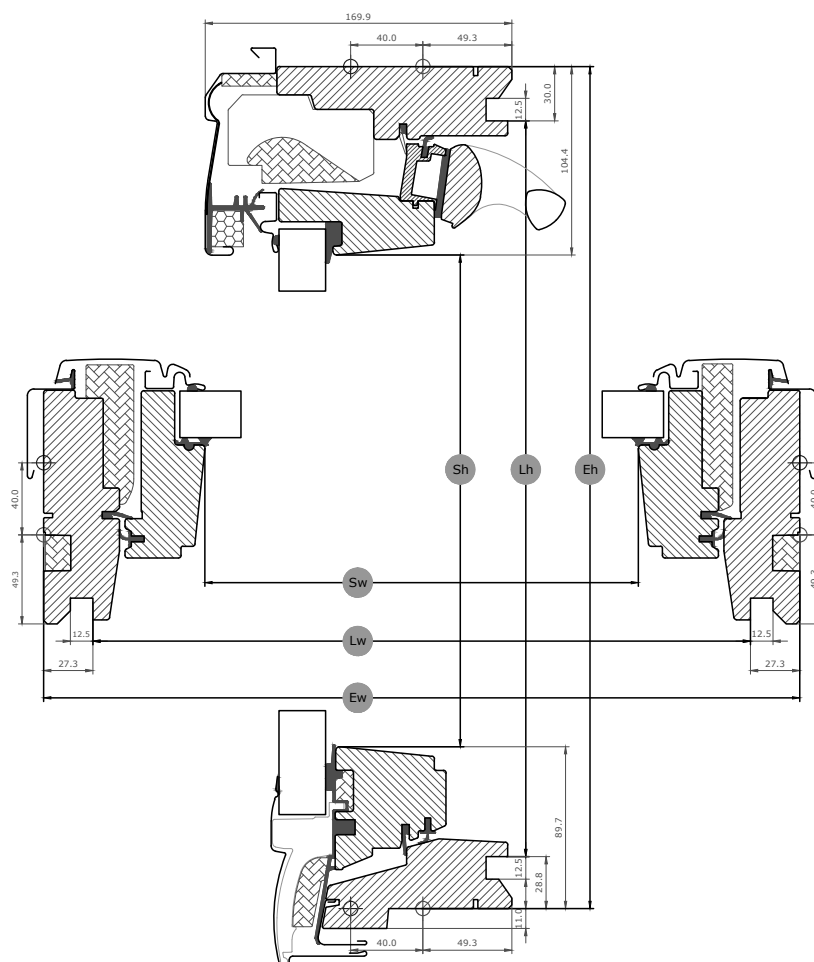







Cross section dimensions



| Width | | CK-- | FK-- | MK-- | UK-- |
|-------|--|------|------|------|------|
| Sw | Sash aperture width | 371 | 481 | 601 | 1161 |
| Lw | Distance between lining grooves, width | 495 | 605 | 725 | 1285 |
| Ew | Exterior frame width | 550 | 660 | 780 | 1340 |

| Height | | --04 | --06 | --08 |
|--------|---|------|------|------|
| Sh | Sash aperture height | 784 | 984 | 1204 |
| Lh | Distance between lining grooves, height | 919 | 1119 | 1339 |
| Eh | Exterior frame height | 978 | 1178 | 1398 |

Glazing features

| Glazing 70 | |  |
|---|--|---|
|  | Heat insulation The low energy glazing unit reduces heat loss through the window and enhanced indoor comfort. | $U_g = 1.0$ |
|  | Solar gain In colder climates and in rooms with large window areas, solar gain provides a better indoor climate during winter periods. | $g = 0.46$ |
|  | Solar protection In warm climates and in rooms with large window areas, a sun protective glazing unit provides a better indoor climate during summer periods. | ★★★★☆ |
|  | Sound insulation A combination of laminated glass and extra thick glass provides better sound insulation against noise from outside (traffic, playgrounds, etc). | $R_w \text{ dB} = 35(-1;-3)$ |
|  | Security Thicker laminated inner glass increases resistance to manual attack (burglary). | ★★★★☆ |
|  | Safety lamination Prevents glass from falling into the room in case of accidental breakage. | ✓ |
|  | Toughened glass Adds strength to the outer pane to protect from wayward balls and extreme weather such as heavy storms and hail. | ✓ |
|  | UV filter Protects your interior furnishings from fading due to the sun's harmful UV rays. | ✓ |
|  | Rain noise reduction Rain noise reduction creates a barrier between the window and the weather outside for undisturbed moments during rainy days – or nights. | ✓ |

Glazing structure

| Glazing unit | Composition (from inside to outside) |
|---------------|---|
| Double-glazed | 6.8 mm laminated inner glass with coating - 16 mm argon - 4 mm toughened outer glass with coating |

Technical values for the window

Overview of technical values for the product, covering CE marking in accordance with EN 14531 and other EN standards.

| Window characteristics | Performance |
|--|--------------------------|
| Thermal transmittance (U-value) | 1.3 W/(m ² K) |
| Light transmittance (τ _v) | 0.68 |
| Total solar energy transmittance (g-value) | 0.46 |
| Sound insulation | 35(-1;-3) |
| Air permeability | 4 |
| External fire performance - British | AC |
| External fire performance - European | npd |
| Impact resistance | 3 |
| Load-bearing capacity of safety | |
| Reaction to fire | C-s1,d2 |
| Resistance to snow load | See glazing composition |
| Resistance to wind load | C3 (>SK08: NPD) |
| Water tightness | E900 |

Visible features



Control bar

The ergonomic aluminum control bar allows effortless opening and closing of the window. It can also lock the ventilation flap in the ventilation position.



Glazing bar

The vertical glazing bar delivers a classic, traditional look to the conservation window.



Blind bracket, manual

Easily install blinds on the window without the need for extra tools using the VELUX Pick&Click™ system.



Frame hinge, centre-pivot, side

Durable hinge design allows for reliable operation and enables the sash to be rotated for easy cleaning of the outer pane.



Interior insulation, frame top sides

Innovative ThermoTechnology™ insulation is integrated into the top frame sides of the window to increase energy-efficiency.



Barrel bolt

The barrel bolt can be placed into the integrated barrel bolt bushing to secure the window for cleaning of outer glass surface or for safe ventilation.



Headlock

When closed, the window is locked firmly into place by the headlock.



Data plate

Every VELUX roof window has a unique data plate with information that can be used to look up CE marking documentation, when purchasing accessories or in case of service or replacement.


Interior finish

| Material Description | Clear lacquer Finished with triple coat, clear lacquered. | White-painted Finished with triple coat, white painted. |
|--|--|--|
| Colour code NCS, inner surface | - | S 0500-N |
| Colour code nearest RAL, inner surface | - | 9003 |

Exterior covers

| Material Description | Aluminium, black Black |
|--|---------------------------|
| Colour code NCS, outer surface | S 9000-N |
| Colour code nearest RAL, outer surface | 9005 |

Cleaning and maintenance



To clean the outer glass surface from the inside, rotate sash manually and secure in cleaning position with barrel bolts.



VELUX repair and maintenance kits are available.

Guarantee period

Flashings and installation products



Flashings

Install the VELUX roof window in virtually any roofing material by using genuine VELUX flashing solutions. Our flashings are designed specifically for the exact size and shape of the roof windows to create perfect, watertight fit. Flashings can also be used to combine multiple roof windows.

Installation products

Ensure a proper installation and an air- and watertight connection between the window and roof with VELUX installation products. All installation products are designed to perfectly fit the roof window for a reliable and durable result.

Blinds, awnings and shutters

Complete the VELUX roof window installation with roller shutters and awning blinds for heat protection and interior blinds for light dimming, blackout and insect protection. Choose from a wide range of manually operated or remote-controlled products that are made to fit the particular window type and size. Please contact your local VELUX sales company for more details about compatibility.

Further information

We reserve the right to make technical changes.

For more information on our products, please visit <https://velux.com>.